

CT2.11# – TIMBER SUBJECT TO AGREEMENT (6/72). In addition, there is within Sale Area an unestimated quantity of Non-sawtimber meeting the minimum specifications in AT2 that shall be Included Timber upon written agreement.

CT2.2# - UTILIZATION AND REMOVAL OF INCLUDED PRODUCTS (4/03). Unless otherwise agreed in writing, or as specified in CT2.211# - Optional Removal of Non-sawtimber Products, Purchaser is required to pay for and remove the following products described in AT2 of the contract.

Sawtimber is the boles of trees meeting Sawtimber Product specifications as listed in AT2 of the contract.

Non-sawtimber is the boles of trees meeting Non-sawtimber Product specifications as listed in AT2 of the contract, but that do not meet the minimum piece specifications for Sawtimber Products. Non-sawtimber removal is only required in Cutting Units N/A. Only the volume of non-sawtimber in the cutting units listed above is included in the estimated volume shown in AT2. If the purchaser and the Forest Service agree to remove non-sawtimber from cutting units other than those listed above this non-sawtimber must be measured and paid for at the rates shown in AT4.

CT2.352# – DESIGNATION BY SPECIES AND DIAMETER. (4/04) Trees that meet Utilization Standards are designated for cutting, as shown on the Tree Designation Table and Sale Area Map, except trees Marked with **Orange** paint or described to be left uncut.

Tree Designation Table

Payment Unit(s)	Designated Species <u>1/</u>	More than Stump Diameter (inches) <u>2/</u>	Less than Stump Diameter (inches) <u>2/</u>
ALL	Douglas fir, subalpine fir	9.0	N/A

Additional trees to be cut, if any, are Marked with a horizontal band and stump mark of **Blue** paint.

All species shall be left as leave trees, unless Marked with Blue paint. Leave 1/ N/A trees of the designated cut species, 2/ N/A inches stump diameter or greater, to avoid leave tree spacing greater than 3/ N/A feet. Cutting unit boundaries and other trees that shall be left uncut are Marked with vertical stripes and a stump mark of **Orange** paint.

Distances are measured horizontal distances, outside bark stump height to outside bark stump height. Stump diameter is measured outside bark at stump height in a horizontal plane and is the average of a measurement across the short axis through the true center of the stump and a second measurement at right angles to the short axis.

Lost Johnny Point Hazard Timber Sale Special Provisions

Purchaser and Forest Service shall agree to skid trail location under BT6.422. Skid trails shall be no greater than N/A feet wide with a N/A foot spacing. Quantities of trees located in skid trails N/A Included Timber under AT2.

CT4.211 - DOWNPAYMENT (6/07). The downpayment amount shown in AT15 may not be applied toward any other payment required under the provisions of this contract, except damages determined pursuant to BT9.4, transferred to other timber sales, or refunded until (a) stumpage value representing 25 percent of the total bid value of the timber sale is shown on Timber Sale Account to have been cut, removed, and paid for, or (b) the estimated value remaining to be cut and removed, as shown on Timber Sale Account, is equal to or less than the amount of the downpayment, or (c) if 36 CFR 223.49(e) is applicable, the estimated value remaining to be cut and removed, as shown on Timber Sale Account, is equal to or less than the amount of the downpayment. For lump sum timber sales, the downpayment may be applied to payment for release of the single payment unit.

If Forest Service makes a determination that this contract should not have been included under increased downpayment requirements (36 CFR 223.49(e)), the downpayment shall be revised and applied in accordance with 36 CFR 223.49(f).

CT4.212 - TEMPORARY REDUCTION OF DOWNPAYMENT (8/09). Notwithstanding BT4.211 or CT4.211, upon the Purchaser's written request Forest Service may temporarily reduce the downpayment when Purchaser's scheduled operations are delayed or interrupted for 30 or more consecutive days, or the contract term is extended for 30 or more consecutive days for any of the following reasons:

- (1) Forest Service requests or orders Purchaser to delay or interrupt scheduled operations for reasons other than breach;
- (2) Purchaser interrupts or delays scheduled operations to work on a sale designated by the Forest Service as in urgent need of harvesting; or
- (3) An adjustment of the contract term authorized upon a determination of substantial overriding public interest, including a market-related contract term addition, or an urgent removal contract term extension under 36 CFR 223.53.

When Purchaser is not cutting or removing timber under contract during a qualifying period of delay, interruption, or extension listed above the downpayment may be reduced to \$1000 or 2 percent of the downpayment amount stated in the contract, whichever is greater. The Purchaser must restore the downpayment to the full amount stated in the contract within 15 days from receipt of the bill for collection and written notice from the Contracting Officer that the basis for temporarily reducing the downpayment no longer exists. Purchaser shall not cut or remove timber on a contract where the downpayment has been temporarily reduced until the downpayment amount stated in the contract is fully restored.

CT4.4 - PAYMENTS NOT RECEIVED (8/12). (a) Payments are due and payable on the date of issue indicated on the bill for collection. When a payment for timber cut and other charges is not

Lost Johnny Point Hazard Timber Sale Special Provisions

received at the location designated by Forest Service by the date specified in the bill for collection, Contracting Officer will suspend all or any part of Purchaser's Operations until payment or acceptable payment guarantee is received. Other charges include, but are not limited to:

- (i) Slash disposal and road maintenance deposits;
- (ii) Cooperative work at rates established by specific agreement under BT4.218;
- (iii) Damages pursuant to BT9.4;
- (iv) Road use fees;
- (v) Restoration of downpayment pursuant to BT4.22;
- (vi) Periodic payments pursuant to BT4.213;
- (vii) Extension Deposits pursuant to BT4.217; and
- (viii) Other mandatory deposits.

(b) Failure to pay amounts due by the date specified in the bill for collection shall be considered a breach under BT9.3. The 30-day notice period prescribed therein shall begin to run as of the end of business on the date specified for receipt of payments. If the performance or payment is guaranteed by surety bond, the surety will receive a copy of the written notification of breach. Demand will be made on the surety or other institution providing the guarantee or bond instrument for immediate payment 10 days after issuance of written notification of the breach.

(c) Pursuant to the Debt Collection Improvement Act of 1996, as amended, if payment is not received by Forest Service within 15 days after the date of issue indicated on the bill for collection:

(i) Simple interest shall be assessed at the Current Value of Funds Rate as established by the Secretary of the Treasury. Interest will begin to accrue as of the date of issue indicated on the initial bill for collection.

(ii) Debtors will be assessed administrative charges, in addition to the delinquent amount due. Administrative charges are those additional costs incurred by the Government in processing, handling, and collecting delinquent debts.

(iii) A penalty charge of six (6) percent per annum will be assessed on any portion of a debt delinquent more than 90 days. This penalty charge is in addition to interest and administrative charges under paragraphs (c)(i) and (c)(ii). The penalty charge shall accrue from the date of issue indicated on the bill for collection and shall be assessed on all outstanding amounts, including interest and administrative costs assessed under paragraphs (c)(i) and (c)(ii).

(iv) Payments will be credited on the date received by the Federal Depository or Collection Officer designated on the bill for collection.

(d) Forest Service remedies for Purchaser's failure to make payment for timber cut and other charges when due, except for accrual of interest, suspension of all or any part of Purchaser's Operations, and administrative offset, shall be stayed for so long as:

- (i) A bona fide dispute exists as to Purchaser's obligation to make such payment and
- (ii) Purchaser files and prosecutes a timely Claim.

CT5.31# – ROAD MAINTENANCE REQUIREMENTS (7/01). Purchaser shall maintain roads in accordance with the following Contract Road Maintenance Requirements Summary:

Contract Road Maintenance Requirements Summary

Lost Johnny Point Hazard Timber Sale Special Provisions

Road	Termini		Miles	Applicable Prehaul Road Maintenance Specifications									
	From	To											
1064A													
895													

P = Purchaser Performance Item, D = Deposit to Forest Service, D3 = Deposit to Third Party

Road	Termini		Miles	Applicable During Haul Road Maintenance Specifications									
	From	To		T-113	T-201								
1064A	0	0.47	0.47	P	P								
895	0	9.70	9.70	P	P								

P = Purchaser Performance Item, D = Deposit to Forest Service, D3 = Deposit to Third Party

Road	Termini		Miles	Applicable Post Haul Road Maintenance Specifications									
	From	To		T-113	T-201								
1064A	0	0.47	0.47	P	P								
895	0	9.70	9.70	P	P								

P = Purchaser Performance Item, D = Deposit to Forest Service, D3 = Deposit to Third Party

SPECIFICATION T-113 SURFACING REPAIR

DESCRIPTION

1.1 Surfacing repair is patching potholes or small areas of broken asphalt or imported aggregate surfaces and asphalt dikes. It includes preparing the area to be patched and furnishing and placing all necessary materials, including base, and other work necessary to patch the surfacing, including paved shoulders. Sections requiring repair work shall be limited in area not to exceed 20 square

feet for paved surfaces or 200 square feet for aggregate surfaces and not more than 10 areas per mile per year.

MATERIAL

2.1 Materials used for repair of aggregate surfacing shall conform to these specifications:

2.2 Materials used for asphalt patching shall conform to or exceed the requirements of these specifications:

REQUIREMENTS

3.1 Aggregate Surfacing Repair. Aggregate material shall be placed in accordance with the applicable specification used in paragraph 2.1 above. Work under this specification shall be performed in a timely manner to reduce further deterioration of the surface.

3.2 Asphalt Surfacing Repair.

A. Potholes (deep patch). Remove the surface course and base course as deep as necessary to reach firm support; extend horizontally at least six (6) inches into good asphalt surfacing surrounding the cracked area. Make the cut square or rectangular with faces straight and vertical. Prime the bottom and faces using MC70, MC250, MC800, or emulsified asphalt (penetration type). Backfill the hole with asphalt mix and compact. Use 2-inch layers if the hole is more than four (4) inches deep. Compact each layer thoroughly with mechanical tampers or rollers. Compaction shall not be done with equipment wheels without prior approval. The patch when completed and compacted shall be flush with surrounding surface.

B. Skin Patches. Minor depressions, light ravelling, or surface checking at scattered locations shall be treated by applying a skin patch. Carefully broom the surface of all loose material and apply a tack coat of MC70, MC250, or emulsified asphalt (penetration type) at the rate of 1/10-gallon per square yard. Place asphalt mix, distribute uniformly, and feather edges with asphalt rakes so the patch when compacted shall be flush with the adjoining surface. Roll thoroughly with a portable roller.

3.3 Asphalt Dikes. Asphalt material in the damaged length of dike shall be removed. Clean and repair asphalt foundation as necessary. Level exposed ends of existing dike. Prime all surfaces with bituminous material. Asphalt mix shall be placed and compacted to conform with the shape of the original dike.

1. All asphalt material removed from potholes, patches, and dikes shall be disposed of in designated area.

SPECIFICATION T-201 SHOULDER MAINTENANCE

DESCRIPTION

1.1 Shoulder maintenance consists of keeping that portion of roadway adjacent to a paved and/or aggregate surface in a reasonably smooth condition and flush with the pavement and/or aggregate in order to provide lateral support to the surface. It may require blading, furnishing, and placing additional material, application of bituminous material, and any other work incidental to the maintenance of the shoulder.

MATERIALS

2.1 Materials selected for shoulder maintenance shall be similar to the material used in the previous construction or maintenance.

REQUIREMENTS

3.1 Shoulder Blading. Replace material as necessary. Blade and shape the entire width of the shoulder to drain the paved or aggregate surface. The shoulder material shall be moistened if necessary to ensure reasonable compaction and graded flush with the pavement or aggregate edge. The entire shoulder shall be fully compacted.

2. Asphalt Stabilized Shoulders. Where shoulder has been previously stabilized with bituminous treatment, reapplication of bituminous material shall be made when 50 percent of the shoulder surface material is no longer held in place by bitumen. Prior to treatment, it may be necessary to replace earth or aggregate material lost or moved since last application.

CT5.316 - SNOW REMOVAL. (4/13) Snow removal shall be done in a manner to preserve and protect the roads, to insure safe and efficient transportation and to prevent unacceptable damage to roads, streams, and adjacent lands.

A. Description. Snow removal work by Purchaser shall include:

1. Removal of snow from entire width of road surface including turnouts.
2. Removal of snow slides, minor earth slides, fallen timber and boulders that obstruct normal road surface width including turnouts.
3. Maintenance of drainage so that the drainage system will function efficiently and prevent erosion damage.

Lost Johnny Point Hazard Timber Sale Special Provisions

B. Performance. Snow removal shall be kept current and performed as often as necessary to insure safe and efficient transportation. Work shall be done in accordance with the following minimum standards of performance.

1. All debris, except snow and ice, that is removed from the road surface and ditches shall be deposited away from stream channels at agreed locations.
2. During snow removal operations, banks shall not be undercut nor shall gravel or other surfacing material be bladed off the roadway surface.
3. Ditches and culverts shall be kept functional during and following road use.
4. Snow berms shall not be left on the running surface of the road. Berms left on the shoulder of road shall be removed and/or drainage holes shall be opened and maintained in them. Drainage holes shall be spaced as needed to obtain satisfactory surface drainage without discharge on erodible fills.
5. Dozers or skidders shall not be used to plow snow on system roads without written approval of Forest Service. If approved, dozers and skidders must be equipped with shoes or runners to keep the plow blade a minimum of two inches above the road surface.
6. Snow removal must be done in such a way as to protect surface water drainage structures and the road surface. Any damage from, or as a result of, Purchaser's snow removal work shall be restored in a timely manner at Purchaser's expense.

CT5.41# - CLOSURE TO USE BY OTHERS (3/07).

A. Closure of Roads During Period of Contract. Unless otherwise agreed in writing between Purchaser and Forest Service, Purchaser shall within 15 days of receipt of notice from Forest Service, install closure devices listed below and close them on roads designated "To Be Closed" on Sale Area Map and listed below to effectively block access to vehicle traffic except that constituting official use. Installation of closure devices shall follow closure details attached hereto and made a part hereof.

Official vehicle traffic shall constitute that use by Purchaser and his employees when engaged in timber sale activities. It shall also include administrative traffic by Forest Service, and other landowners for the administration of their lands. Purchaser shall close road as directed by Forest Service at the completion of daily activities or maintain closure after passage of each vehicle. Forest Service will monitor and administer closure activities.

CLOSURE DEVICES					
Road Number	Location	Furnished By	Closure Method	Closure Device Installed By	In Place

Lost Johnny Point Hazard Timber Sale Special Provisions

1064A	MP 0.02	FS	Gate	FS	YES

During the life of this contract, Purchaser shall install temporary barricades at locations designated "Temporary activity Barricade" on Sale Area Map and shown below. Temporary barricades shall be installed so that they may be readily opened by Purchaser or Forest Service for access to Sale Area in case of fire or other emergency. Official vehicle traffic shall also include administrative traffic by Forest Service and other landowners for the administration of their lands. Purchaser shall provide and post approved signs as authorized by Forest Service. Installation of Temporary Activity Barricades shall follow closure details attached hereto and made a part hereof.

During the period January 1 to December 31 when Purchaser's Operations are in areas otherwise closed to motorized vehicles, Purchaser shall not be permitted to hunt, transport hunters, discharge firearms or transport big game animals with vehicles within the closed areas.

TEMPORARY ACTIVITY BARRICADES

Road Number	Location	Closure Method
N/A		

B. Closure of Roads at End of Purchaser's Use. Unless otherwise agreed in writing between Purchaser and Forest Service, upon completion of use, Purchaser shall effectively close to public use the following roads designated "To Be Closed" on Sale Area Map and listed below. Existing locking closure devices shall be closed and locked as directed by Forest Service. As an element of final road maintenance and environmental or resource protection, the designated closure shall be accomplished by using the methods required for each road as described below:

Closure Location(s)				
Road Number	Location	Closure Method	Furnished By	In Place

Lost Johnny Point Hazard Timber Sale Special Provisions

N/A				

CT6.10 - PREWORK CONFERENCE (10/04). Annually, prior to commencement of work, a prework conference will be held to discuss contract terms and work performance requirements. Also at this meeting such things as responsibility under OSHA, and procedures for how undesignated timber that may have to be added to the contract (including danger trees) shall be discussed and documented.

The Purchaser, or designated representative, will arrange for the meeting with the Contracting Officer.

CT6.23 - PROTECTION OF LAND SURVEY MONUMENTS (10/04). Forest Service shall appropriately designate on the ground all known survey monuments including but not limited to horizontal control stations (Triangulation Stations), vertical control stations (Bench Marks), property corner monuments, and all Public Land Survey System monuments. This shall include reference monuments, corner accessories such as bearing trees, line trees and line posts. Identifying signs shall be posted by Forest Service on two sides of each known bearing tree and each line post shall be posted with a metal sign or decal. Line trees may be cut if designated under BT2.3.

In authorized clearings such as Clearcutting Units and road construction clearings, and in other instances where damage to survey monuments, corners, corner accessories and survey of property line markers is unavoidable, Forest Service shall arrange protective or perpetuative action which does not cause unnecessary delay to Purchaser.

Purchaser shall protect all known survey monuments, witness corners, reference monuments, bearing trees and line markers against avoidable destruction, obliteration or damage during Purchaser's Operations. Additional monuments or objects discovered on the area shall be promptly reported to the other party and shall also be protected. If any known monuments, corners, corner accessories, and survey or property line markers are destroyed, obliterated or damaged during Purchaser's Operations, Purchaser shall employ a registered professional land surveyor to reestablish or restore at the same location the monuments, corners, corner accessories or line markers. Such surveyors shall use procedures and monumentation that accords with the Bureau of Land Management Manual of Instructions for the Survey of the Public Lands of the United States for General Land Office surveys and any applicable State statutes concerned with land surveys. Purchaser's agent shall record such surveys in accordance with state survey statutes.

Lost Johnny Point Hazard Timber Sale Special Provisions

CT6.24# – SITE SPECIFIC SPECIAL PROTECTION MEASURES (4/04). Special protection measures needed to protect known areas identified on Sale Area Map or on the ground include:

Cultural Resource Protection Measures:

Wildlife and Botanical Protection Measures:

Purchaser shall comply with the Northern Continental Divide Grizzly Bear Food Storage and Sanitation Order.

Cave Resource Protection Measures:

CT6.310# - SALVAGE CUTTING SCHEDULE (5/80). To accomplish special salvage objectives of this contract, Included Timber in Cutting Units ALL shall be cut and removed from Sale Area by **June 30, 2015** unless waived in writing by Forest Service.

CT6.316# - LIMITED OPERATING PERIOD (5/05). Except when agreed otherwise in writing, Purchaser's operations shall be limited as follows:

All harvest related activities must be completed by **July 15, 2015**.

Attachment BT6.33

10/01

LOGGING AND MAINTENANCE OPERATIONS SIGNING STANDARDS

All signs must be manufactured & installed as specified in the FHWA "**Manual on Uniform Traffic Control Devices**" (MUTCD) & FS publication "**Standards for Forest Service Signs & Posters**"(EM 7100-15).

SIGN STANDARDS

SHAPE & COLOR: Generally, signs for logging and maintenance operations are either diamond-shaped or rectangular. All signs are **reflective orange background with black legend and border** unless shown otherwise. Handpainted, homemade signs are not legal. Fluorescent paint is not reflectorized.

SUBSTRATE: Sign substrate material may be High Density Overlay (HDO) Plywood, Aluminum, Fiberglass Reinforced Plastic, Corrugated Plastic or Roll-up Fabrics.

SIGN SIZE: Sign size is a factor of speed and MUTCD & FS standards. Where conditions of speed, volume, or special hazard require greater visibility or emphasis, larger signs should be used. Minimum sizes for the most common signs can be found in Figure 4. Refer to the EM-7100-15 for additional sign sizes.

LEGEND: All lettering shall be Series "C" alphabet, conforming to Standard Alphabets for Highway Signs. Letter size is also a function of speed - use letter size and word messages as specified in MUTCD and EM-7100-15.

SIGN PLACEMENT

Lost Johnny Point Hazard Timber Sale Special Provisions

Signs are to be installed in locations as agreed to in the traffic control plan. All signs are to be removed, covered, or folded when operations are not in progress or the sign message is not applicable. Signs should generally be located on the right-hand side of the roadway. When special emphasis is needed, signs may be placed on both the left and right sides of the road. Sign message shall be clearly visible to road users, mounted on posts or portable sign stands.

LATERAL CLEARANCE

From the edge of the road - 2 foot minimum, where slope limits to less than 6 feet. 6-12 foot preferred.

HEIGHT

Minimum of 7 feet, measured from the bottom of the sign to the near edge of the travelway. The height to the bottom of a supplemental sign mounted below the primary sign will be 6 feet.

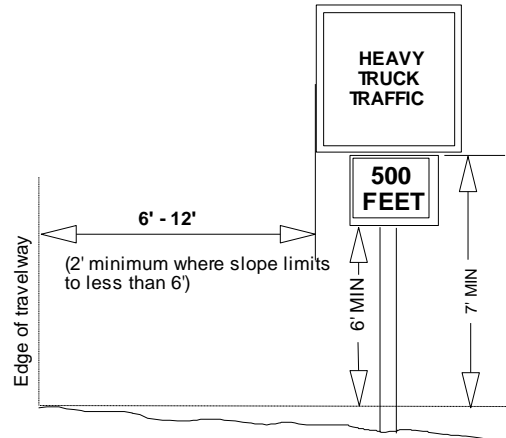


Figure 1: Sign Placement Dimensions

PLACEMENT DISTANCE

Signs must be located 100-500 feet prior to the activity, (both ends if a through road) and maintained at that distance. This distance is based on speed. Refer to Figure 2, Table II-1, MUTCD, a portion of which is reproduced here, to determine correct placement distance.





Posted or 85 percentile speed MPH	Deceleration to listed advisory speed MPH				
	10	20	30	40	50
20	NA				
25	100				
30	150	100			
35	200	175			
40	275	250	175		
45	350	300	250		
50	425	400	325	225	
55	500	475	400	300	
60	575	550	500	400	300
65	650	625	575	500	375

Figure 2: A Portion of MUTCD TABLE II-1

SIGN SUPPORTS

POSTS: Signs are to be mounted on separate posts. Supplemental signs such as Speed Advisory plates are to be mounted on the same post as the primary sign. **Do not mount signs on trees or other signs.** Posts may be wood, metal, carsonite or similar material. Where sign supports cannot be sufficiently offset from the road edge, supports will meet breakaway standards. Single wood posts with less than 24 square inches do not require breakaway design.

TEMPORARY/PORTABLE SUPPORTS: Portable supports may be used for short-term, short-duration, and mobile conditions. MUTCD defines this time period as one work shift, 12 hours or less. All portable supports must meet MUTCD standards, including breakaway. These must be a minimum of 1 foot above the road surface or more if visibility requires it.



Lost Johnny Point Hazard Timber Sale Special Provisions

Figure 3: Examples of Temporary/Portable Supports

SIGNS

The following signs meet the intent of Timber Sale Contract Provision BT6.33, SAFETY.

This is not a complete listing of signs that may be needed.



FG20-1-48*



FG20-2-48



FG20-3-42*



FG20-3a-42



FW22-3-30



FW20-1-30*



W21-3-30*



FW21-4a-30



FW11-7-24



W22-1-36*



FW8-6-24



FW11-9a-24



W7-3a-24*



W13-1-18**



W20-7aP-24*



BM-L-O



BM-R-O

Barricade Markers (See MUTCD for length and stripe size)

* Specify Distance

Lost Johnny Point Hazard Timber Sale Special Provisions

** Specify Speed

Figure 4: Commonly Used Construction and Maintenance Signs

CT6.332 - SAFETY (TIMBER HAULING) (10/04). Purchaser shall secure all products transported by truck with at least two chain or cable wrappers over the load, such wrappers being securely fastened to effectively contain every bolt or log in at least two places.

CT6.339 – ACCIDENT AND INJURY NOTIFICATION (4/05). Purchaser shall notify Forest Service of any lost time personal injury accident or any accident or vandalism resulting in personal property damage over \$400 in value that occurs as a result of or is associated with Purchaser's Operations.

Purchaser shall notify Forest Service within 8 hours of any personal injury accident. For vandalism and personal property accidents, Purchaser shall notify Forest Service at the same time notification is given to the state and local law enforcement authorities.

Purchaser shall take all reasonable measures after an accident or vandalism event to preserve the scene of the incident and provide information to facilitate a Forest Service investigation.

The method of notification shall be agreed to in writing at the prework conference required by provision CT6.10.

CT6.351# – WASHING EQUIPMENT (7/07). In order to prevent the spread of noxious weeds into the Sale Area, Purchaser shall be required to clean all "Off-Road Equipment" prior to entry on to the Sale Area. This cleaning shall remove all soil, plant parts, seeds, vegetative matter, or other debris that could contain or hold seeds. Only logging and construction equipment so cleaned and inspected by the Forest Service will be allowed to operate within the Sale Area. All subsequent move-ins of equipment to the Sale Area shall be treated in the same manner as the initial move in. For purposes of this provision, "Off-Road Equipment" includes all logging and construction machinery, except for log trucks, chip vans, service vehicles, water trucks, pickup trucks, cars, and similar vehicles.

Purchaser shall employ whatever cleaning methods are necessary to ensure that Off-Road Equipment is free of noxious weeds. Equipment shall be considered free of soil, seed, and other such debris when a visual inspection does not disclose such material. Disassembly of equipment components or specialized inspection tools is not required.

In order to prevent the spread of noxious weed species N/A the Sale Area, Purchaser shall be required to clean all off-road logging and construction equipment that operates in N/A prior to the equipment leaving N/A. Purchaser and Forest Service shall agree on methods of cleaning, locations for the cleaning, and control of off-site impacts, if any.

Lost Johnny Point Hazard Timber Sale Special Provisions

Unless otherwise agreed, Purchaser shall give the Forest Service at least 24 hours notice when equipment is ready for inspection. Notification will include an agreed upon location where the equipment will be available for inspection by the forest service.

New infestations of noxious weeds, of concern to Forest Service and identified by either Purchaser or Forest Service, on the Sale Area or on the haul route, shall be promptly reported to the other party. Purchaser and Forest Service shall agree on treatment methods to reduce or stop the spread of noxious weeds when new infestations are found. A current list of noxious weeds of concern to Forest Service is available at each Forest Service office.

CT6.4# - CONDUCT OF LOGGING (3/83). Unless otherwise agreed in writing, silvicultural prescriptions and land management objectives shall be conducted and accomplished by the following requirements, methods and procedures:

Cutting Unit	Conduct of Logging
All	Purchaser and Forest Service will agree on felling lead at the time of approval of tractor roads.
	Logs shall be tractor skidded with the leading edge free of the ground.

CT6.41# - SPECIAL FELLING REQUIREMENTS (10/04). Unless otherwise agreed in writing, the following special requirements shall be met in felling timber designated for cutting:

Cutting Unit	Item or Area to be protected	Protection Measure
ALL	Recreation Structures	Fell trees away from existing structures.
ALL	Paved Surfaces	Felling trees onto paved surfaces is prohibited.

CT6.50# - STREAMSIDE MANAGEMENT ZONES (12/90). A Streamside Management Zone (SMZ) is a zone that contains riparian vegetation and other special characteristics. Areas identified as Streamside Management Zones (SMZ's) are shown on the Sale Area Map and designated 50 feet from the high water mark of Hungry Horse Reservoir.

Timber designation, conduct of logging, and/or slash treatment may differ in the SMZ from the rest of the unit. Unless otherwise agreed to in writing and notwithstanding the contract requirements otherwise applicable to each cutting unit, the following special requirements apply to the SMZ of the cutting units specified below:

Streamside Management	
Cutting Unit	Zone Requirements

Lost Johnny Point Hazard Timber Sale Special Provisions

1,3	No skidding equipment is allowed to operate within the area. Merchantable products shall be winched from outside the area.
-----	--

CT6.6 - EROSION PREVENTION AND CONTROL (9/06).

Unless otherwise agreed in writing, Purchaser shall complete erosion prevention and control work required in section BT6.6, including Streamcourse protection, within 15 calendar days after completion of skidding and/or yarding operations for each landing.

Designation of on the ground work shall be done as promptly as feasible unless it is agreed that the location of such work can be established without marking on the ground.

During periods of accelerated water runoff, especially during the spring runoff and periods of heavy rainfall, Purchaser shall inspect and open culverts and drainage structures, construct special cross ditches for road runoff, and take other reasonable measures needed to prevent soil erosion and siltation of streams.

When operations are active outside the Normal Operating Season defined in AT13, erosion control work will be kept current and will be completed as soon as practicable.

CT6.601# - EROSION CONTROL SEEDING (3/07). Following completion of skidding and yarding operations in an area, Purchaser shall seed and fertilize all exposed areas of raw soil on skid trails, landings, firebreaks, slides, slumps, Temporary Roads and traveled ways of National Forest system roads scheduled for stabilization by Purchaser after operations. Special Provision CT5.419# - SYSTEM ROAD STABILIZATION contains a list of the roads requiring seeding and fertilizing.

Soil on areas to be seeded shall be left in a roughened condition favorable to the retention and germination of the seed or as specified in Special Provision CT6.633# - TEMPORARY ROAD, SKID TRAIL/SKID ROAD AND LANDING SCARIFICATION.

Seed and fertilizer shall be spread evenly at the rate of 25 pounds of seed and N/A pounds of fertilizer per acre. When fertilizer and seed are applied in separate operations, the second operation shall be carried out within 72 hours of the first.

Application shall be during the period June 1 to July15 and under the above specified conditions unless otherwise approved.

The kinds and amounts of seed to be sown in terms of pure live seed (PLS) shall be:

Species of Seed	PLS Pounds per Acre
Blue Wildrye	12
Mountain Brome	5

Lost Johnny Point Hazard Timber Sale Special Provisions

Bluebunch Wheatgrass	4
Slender Wheatgrass	4

Purchaser shall provide to the Forest Service:

1. Blue tags, or copies of blue tags from each seed lot used in the specified mix. Only certified, blue-tagged seed shall be used. The blue tag represents a field certification and serves as evidence of the genetic purity and varietal identity of the seed contained in the seed lot.
2. Labels which indicate the percentage composition of the various species in the seed mix.
3. Copies of Seed Analysis Reports from a certified seed analyst for each seed lot used in the specified mix. Purchaser will obtain this report from the seed provider. Seed Analysis Reports must include at a minimum, content of any noxious weed seeds listed on the current "State of Montana Noxious Weeds List". Only after the Forest Service has verified that this report indicates the seed does not contain any weeds on the current "State of Montana Noxious Weeds List", will the seed be accepted and used.

The following kinds and amounts of standard commercial fertilizer shall be used with guaranteed analysis of contents clearly marked on containers:

Type of Fertilizer	Pounds Per Acre
N/A	

CT6.7 - HAZARD REDUCTION AND SITE PREPARATION (3/89). Purchaser's timing of product removal, hazard reduction and site preparation shall not unnecessarily delay Forest Service slash disposal, site preparation or reforestation. Purchaser shall perform hazard reduction and site preparation work in accordance with the Hazard Reduction and Site Preparation Plan and Map which are attached hereto and made a part hereof. Such work is in addition to Required Deposits for slash disposal.

Leave Tops and Limbs, ALL Units,

All Included Timber shall have tops and limbs cut from the stems prior to skidding. These tops and limbs shall be left in the cutting units where the timber is felled.

Hand Pile, ALL Units,

Purchaser shall hand pile all logging slash within the cutting units as shown on the Hazard Reduction and Site Preparation Map. Piles shall have a minimum height of **6** feet. Piles shall be located at least **20** feet away from any residual green tree. Piles shall be located outside of camp sites as identified by Forest Service. If conditions make it impractical to locate piles so that damage to residual green trees or campsites and structures can be avoided, an area designated by the Forest Service will be cleared and used as a piling area.

Lost Johnny Point Hazard Timber Sale Special Provisions

Piles shall be constructed reasonably compact and free of soil to facilitate burning. Piles shall also be constructed with enough fine material (less than 1/4 inch in diameter), such as twigs and needles to easily ignite and burn the pile. All piles should have a good base to prevent the pile from toppling. Piles will not be made on downed logs or stumps.

Fell Damaged Residual, ALL Units,

Purchaser shall fell all species over **5** feet in height not meeting minimum diameter specifications for Included Timber that are damaged beyond recovery by the Purchaser's Operations. Such trees shall be limbed to a stem diameter of approximately **3** inches, at which point the top shall be cut from the remainder of the stem. These stems shall be bucked into lengths shorter than **3** feet.

CT6.71 - CHANGE IN SLASH TREATMENTS (3/90). Slash treatment measures required in accordance with the Hazard Reduction and Site Preparation Plan and Map may be changed upon written agreement. The Forest Service shall determine the current cost of performing the work to be deleted and the work to be added. When the cost of work deleted exceeds the cost of work added, the agreement shall provide for a lump sum payment to the Forest Service for the amount of the difference.

CT6.711 - BURNING BY PURCHASER (10/79). Purchaser shall obtain a written permit from Forest Service before burning any camp refuse, brush, slash or construction debris at any time throughout the year. The terms of the permit will set forth:

- A. Area or location where burning is permitted.
 - B. Material to be burned.
 - C. Safeguards, including help and equipment to control the fire.
 - D. Special precautions to be taken before burning.
2. Control action needed until the fire is out.

CT6.8 - MEASUREMENT METHOD (10/01). BT2.4 list categories of timber not included in AT2. Such timber may be subsequently included; if so, quantities shall be measured by tree measurement, sample tree measurement, or area estimate. The volume tables to be used are approved R1 Volume Tables for the species involved. Copies of said volume tables are on file in the office of the Forest Supervisor and District Ranger.

CT6.801 - MEASURING (PULP LOGS) (5/80). A pulp log, as shown and specified in AT2, shall be any log or portion of a tree, except western redcedar, dead or alive, not meeting sawlog specifications shown in AT2 and containing at least 50 percent pulpable wood in terms of gross

Lost Johnny Point Hazard Timber Sale Special Provisions

cubic volume. Normal sawlog scaling defects such as stain, shake, checks, crook, sweep, burls, knot clusters, pitch, worm holes, and firm rot are considered pulpable. Fire char is not considered pulpable. Defective logs that will break up under normal debarking operations are not considered pulpable.

Final piece, log, or load volume shall be in terms of gross cubic feet.

When pulp logs are manufactured and marketed in shorter minimum piece lengths than shown in AT2, this shorter pulp log shall be considered as meeting Utilization Standards.

CT6.84 - ACCOUNTABILITY (10/04).

A. Forest Service will issue to Purchaser or designated representative(s) serially numbered woods receipt books for use only on this sale.

The woods receipt books, whether used or unused, shall be accountable property of Forest Service and shall be returned to issuing Contracting Officer in accordance with instructions contained on cover of each book.

B. Purchaser shall require all receipts be filled out in ink and otherwise completed by an individual named in writing. Such permit will then be attached to the load in accordance with instructions on inside cover of woods receipt book. Products will not be hauled from the immediate vicinity where loading is done before the Load Permit is attached to the load.

C. Before products are hauled, the truck driver shall sign the woods permit in ink using legal signature.

D. Purchaser shall assure that all woods receipts (stub portion) and unused tickets are returned to the issuing Contracting Officer or as otherwise agreed.

E. Purchaser shall require truck drivers to stop, if requested by Forest Service, for accountability check when products are in transit from Sale Area to delivery point. Purchaser and Forest Service shall agree to locations for accountability checks in advance of haul. Such locations shall be established only in areas where it is safe to stop trucks.

CT7.2 - NORMAL PRECAUTIONS (2/02). Specific fire precautionary measures are set forth below. Upon request of Forest Service, Purchaser shall permit and assist in periodic testing and inspection of required fire equipment. Purchaser shall promptly remedy deficiencies found through such inspecting and testing.

The following requirements shall apply during the period stated in AT14 and during other such periods as specified by Forest Service.

Lost Johnny Point Hazard Timber Sale Special Provisions

A. Fire Extinguishers and Tools Required with Equipment. Each unit of powered equipment used in connection with this sale shall be equipped with serviceable tools and fire extinguishers acceptable to Forest Service as follows:

1. STATIONARY EQUIPMENT. Examples include yarders, log loaders, Hahn Harvester, stroke delimbers, roadside/landing based processors, whole tree chippers, rock crusher, asphalt plant, or other equipment working at fixed locations such as a landing or rock crushing site.

One - Fire extinguisher, dry chemical type of not less than 2.5-pound capacity with 4 B.C. or higher rating.

One - 5-gallon standard galvanized metal, fiber glass or rubberized backpack water container, with hand pump attached, to be filled at all times.

Weatherproofed tool box marked "FIRE ONLY," equipped with a hasp, kept sealed, and containing:

One - Axe, double bit, 3.5#

Two - Shovels (round point #0 lady or equal)

Two - Pulaskis

The tool box shall be mounted on equipment, if feasible, unless another location is agreed to in writing. The tool box shall be within 100 feet of the designated machine at all times when operating. Only one (1) tool box is required at each active fixed location site.

2. MOBILE EQUIPMENT. Examples include crawler tractors, rubber-tire skidders, soft-track skidders, forwarders, feller-bunchers, feller-processors, excavators, front-end loaders, back-hoes, scrapers, and motor graders.

One - Fire extinguisher, dry chemical type of not less than 2.5-pound capacity with a 4 B.C. or higher rating.

One - Shovel (round point #0 lady or equal). For equipping mobile equipment, an acceptable substitute is a "D-handle" round point shovel with a minimum 27-inch handle and a minimum 8- by 11-inch blade.

One - Axe, double bit, 3.5#, or one pulaski.

3. SUPPORT EQUIPMENT. Examples include trucks, low-boys, busses, pickups, panels, automobiles, service trucks, or similar equipment used in transporting logs, people, equipment, and/or materials.

Lost Johnny Point Hazard Timber Sale Special Provisions

One - Fire extinguisher, dry chemical type of not less than 2.5-pound capacity with 4 B.C. or higher rating

One - Shovel (round point #0 lady or equal)

One - Axe, 2# or over, 26-inch minimum length, or one pulaski

One - Bucket or similar water container (at least 1-gallon capacity)

4. POWER SAWS

One - Shovel (round point #0 lady or equal). Shovel shall be with gas containers and/or no more than 100 feet distance from where sawyer is working.

One - Fire extinguisher, containing not less than eight (8) ounces of extinguisher fluid or a dry chemical powder type of not less than one (1) pound capacity. The extinguisher shall be carried by the operator at all times.

Any fueling or refueling of a power saw shall only be done in an area which is free of or which has first been cleared of all material capable of carrying fire; such power saw shall be moved at least 10 feet from place of fueling before starting.

B. Fire Tools on Sale Area. Purchaser shall furnish and maintain in serviceable condition, in quantities and at locations to be designated by Forest Service, tool boxes, fire tools and other fire equipment to be used only for suppressing forest fires. Each tool box shall be weatherproofed and marked "TOOLS FOR FIRE ONLY" and kept sealed. These requirements are in addition to fire tool requirements for mobile, stationary, support or power saw equipment.

1. Special tool caches shall not be required when less than 20 people are employed on Sale Area, excluding logging truck drivers.

2. Operations employing 20 to 30 people on Sale Area, excluding truck drivers, shall furnish a tool cache as follows:

One - Axe, double bit, 3.5#

Five - Shovels (round point #0 lady or equal)

Five - Pulaskis

For each multiple of 10 people over 30, the above tool cache requirement shall be doubled.

C. **Spark Arresters.** Each internal combustion engine shall be provided with a spark arrester or spark arresting device approved by Forest Service. Exceptions where Forest Service may approve mufflers or other equipment in lieu of spark arresters qualified and rated under Forest Service standard 5100-1a are: (a) small multi-position engines, such as chain saws, shall meet

Lost Johnny Point Hazard Timber Sale Special Provisions

Society of Automotive Engineers J335b standards, (b) passenger-carrying vehicles and light trucks may have baffle-type muffler with tail pipe, (c) heavy-duty trucks may have a vertical stack exhaust system with muffler, provided the exhaust stack extends above the cab of the vehicle, (d) an exhaust driven turbocharger is considered to be a satisfactory spark arrester. Internal combustion engine exhaust systems, arresters and other devices shall be properly installed and maintained.

D. Blasting. Fuse or prima cord shall not be used unless authorized in writing by Forest Service, with special precautions stated.

E. Smoking. Smoking shall not be permitted within logging operations except on surfaced or dirt roads, at landings, within closed vehicles, in camps or at other posted places. Smoking shall not be permitted while working or traveling on foot, within or through Sale Area.

F. Precautions for Stoves. Stovepipes on all temporary buildings, trailers, and tents using wood-burning stoves shall be equipped with roof jacks and serviceable spark arresters of mesh with openings no larger than 5/8 inch. All stovepipes, inside and out, shall not be closer than two (2) feet from any wood or other flammable material or one (1) foot if the combustible material is protected by a metal or asbestos shield.

G. Debris Around Buildings. The grounds around buildings, tents and other structures shall be kept free of flammable material for a distance of at least 15 feet from the wall of such structures.

H. Storage of Petroleum and Other Highly Inflammable Products. Gasoline, oil, grease, or other highly flammable material shall be stored either in a separate building or at a site where all combustible debris and vegetation is cleared away within a radius of 25 feet. Fire extinguishers and/or sand barrels may be required at such locations specified by Forest Service when unusually hazardous conditions exist.

I. Debris Burning and Warming Fires. Burning permits shall be required throughout the year for all debris burning fires. Lunch and warming fires may be allowed in fireproofed areas during periods of low fire danger as specified in the fire plan. Such fires shall not be left unattended.

J. Cable Logging. All tail blocks and corner blocks shall be of an accepted haulback design which prevents line fouling and used with line guards. Such blocks shall be located to prevent cables from rubbing against trees, snags, down logs or rock when operating.

Areas adjacent to blocks shall be cleared of flammable material within a 5-foot radius. One (1) shovel and one (1) pulaski shall be maintained within 10 feet of each block.

K. Emergency Measures. Additional measures and/or other special requirements necessary during periods of critical fire-weather conditions shall be included in the fire prevention and suppression plan.

Lost Johnny Point Hazard Timber Sale Special Provisions

L. **Welding.** Welding and use of cutting torches or cutoff saws will be permitted only in areas that have been cleared or are free of all material capable of carrying fire. Flammable debris and vegetation must be removed from within a minimum 10-foot radius of all welding and cutting operations. A shovel and a 5-gallon standard backpack water container filled and with hand pump attached shall be immediately available for use in the event of a fire start.

CT8.66# – USE OF TIMBER (4/04).

(a) This contract is subject to the Forest Resources Conservation and Shortage Relief Act of 1990, as amended (16 USC 620, *et seq.*).

(b) Except for **NONE** determined pursuant to public hearing to be surplus, unprocessed Included Timber shall not be exported from the United States nor used in direct or indirect substitution for unprocessed timber exported from private lands by Purchaser or any person as defined in the Act (16 USC 620e).

(c) Timber in the following form will be considered unprocessed:

(i) Trees or portions of trees or other roundwood not processed to standards and specifications suitable for end product use;

(ii) Lumber, construction timbers, or cants intended for remanufacturing not meeting standards defined in the Act (16 USC 620e); and

(iii) Aspen or other pulpwood bolts exceeding 100 inches in length.

(d) Unless otherwise agreed in writing, unprocessed Included Timber shall be delivered to a domestic processing facility and shall not be mixed with logs intended for export.

(e) Prior to award, during the life of this contract, and for a period of 3 years from Termination Date, Purchaser shall furnish to Forest Service, upon request, records showing the volume and geographic origin of unprocessed timber from private lands exported or sold for export by Purchaser or affiliates.

(f) Prior to delivering unprocessed Included Timber to another party, Purchaser shall require each buyer, exchangee, or recipient to execute an acceptable agreement that will:

(i) Identify the Federal origin of the timber;

(ii) Specify domestic processing for the timber involved;

(iii) Require the execution of such agreements between the parties to any subsequent transactions involving the timber;

Lost Johnny Point Hazard Timber Sale Special Provisions

(iv) Require that all hammer brands and/or yellow paint must remain on logs until they are either legally exported or domestically processed, whichever is applicable; and

(v) Otherwise comply with the requirements of the Act (16 USC 620d).

(g) No later than 10 days following the execution of any such agreement between Purchaser and another party, Purchaser shall furnish to Forest Service a copy of each such agreement. Purchaser shall retain, for 3 years from Termination Date, the records of all sales, exchanges, or dispositions of all Included Timber.

(h) Upon request, all records dealing with origin and disposition of Included Timber shall be made available to Contracting Officer.

(i) For breach of this Subsection, Forest Service may terminate this contract and take such other action as may be provided by statute or regulation, including the imposition of penalties. When terminated by Forest Service under this Subsection, Forest Service will not be liable for any Claim submitted by Purchaser relating to the termination.